




Rubber Gasket Rings

ADS's Rubber Gasket Rings are made as standard from EPDM 80 rubber and are used to improve the tightness of the connections when using Galvanised Pull Rings.

Only one rubber gasket ring is mounted near each connection. The ring is mounted at random on one of the duct turnouts before assembling the duct.

The sectional view of the rubber gasket ring has the form of a 'U'. Hardness is 80 shore, and the operating temperature is from -40°C to +100°C.

The rubber gasket rings in diameters 80-300mm are also made from NITRIL rubber. NITRIL rubber is resistant to oil and petrol and to some extent acid and bases.

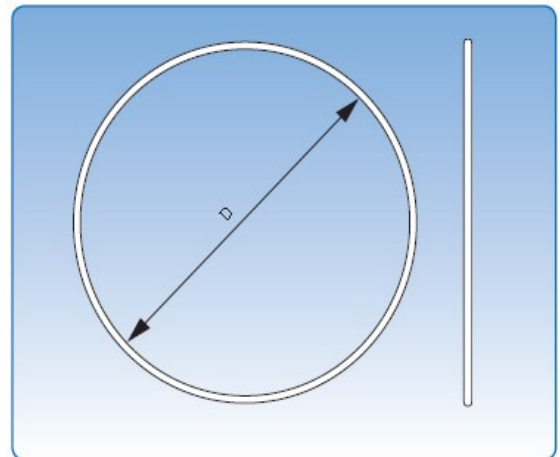

Diameter: 80-300mm

Dimensional Specifications

| D | Part # | Weight/10pcs |
|-----|--------|--------------|
| mm | | kg |
| 80 | RGR080 | 0.20 |
| 100 | RGR100 | 0.30 |
| 120 | RGR120 | 0.45 |
| 125 | RGR125 | 0.50 |
| 140 | RGR140 | 0.60 |
| 150 | RGR150 | 0.60 |
| 160 | RGR160 | 0.70 |
| 180 | RGR180 | 0.70 |
| 200 | RGR200 | 0.80 |
| 225 | RGR225 | 1.10 |
| 250 | RGR250 | 1.12 |
| 275 | RGR275 | 1.12 |
| 300 | RGR300 | 1.30 |

Gasket Rings with compositions other than those listed are available upon request.



3/11 Cooper Street, Campbellfield, Melbourne VIC 3061

Phone: 03 8339 0894 Fax: 03 8339 0871

E-mail: vicsales@adsduct.com.au

1/595 Woodstock Avenue, Glendenning, Sydney NSW 2761

Phone: 02 9675 4546 Fax: 02 9675 4570

E-mail: nswsales@adsduct.com.au

Web Site: www.ductsystems.com.au

1300 DUCT4U (1300 38 28 48)

